



DOOR GUARD MODIFICATION TEMPLATE B- QTY.: _____

(FOR DOOR GUARDS AND ASTRAGALS)



— AVOID ERRORS BY BEING CAREFUL NOW.
— PLEASE COMPLETE ALL STEPS FROM 1 TO 8.

STEP 1: SELECT TYPE: LARSEN PRODUCT # IF KNOWN: _____

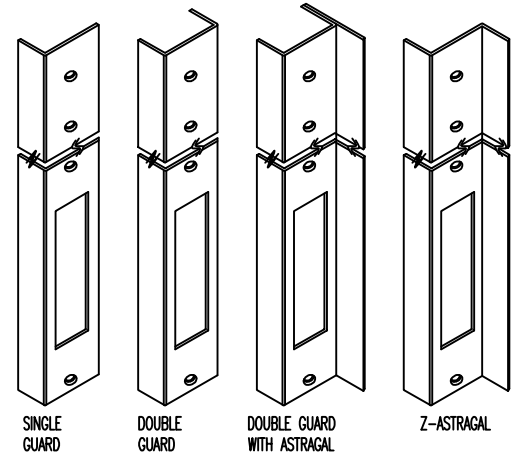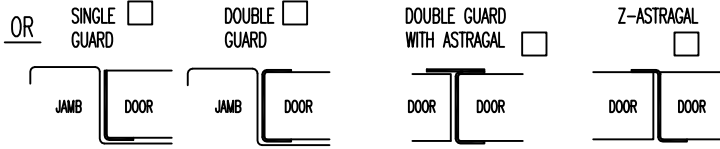


STEP 2: SELECT LENGTH: 79.16 85.097 CUSTOM: _____
 83.118 94.992
 83.771 118.740


STEP 3: SELECT DOOR THICKNESS: STANDARD (1 3/4") CUSTOM: _____

STEP 4: SELECT DOOR TYPE: ACTIVE DOOR INACTIVE DOOR

STEP 5: HANDING OF DOORS:
(ALWAYS VIEWED FROM THE OUTSIDE)

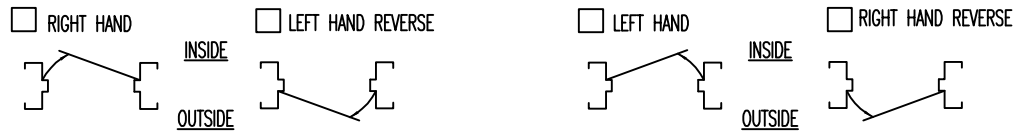

STEP 6: SELECT SHAPE:

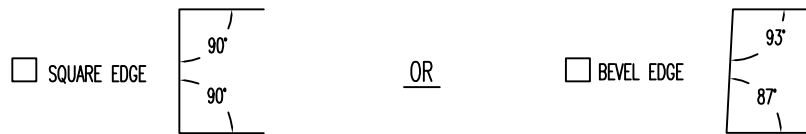

STEP 7: HARDWARE CUTOUT DIMENSIONS:


- NO CUTOUT REQUIRED
 CUTOUT REQUIRED:

DOOR MFG. NAME: _____ WE WILL LOCATE HARDWARE CUTOUTS TO MATCH.

OR CUSTOM:

- LSO BLANK _____
 16L 161 LATCH 1-1/8" x 2-1/4" _____
 86M 86 MORTISE LOCK 1-1/4" x 8" _____
 ASA ASA STRIKE 1-1/4" x 4-7/8" _____
 16S 161 STRIKE 1-1/8" x 2-3/4" _____
 MFB MANUAL FLUSH BOLTS (2) 1" x 6-3/4" _____
 AFB AUTOMATIC FLUSH BOLTS (2) 1" x 8-1/2" _____

| DIM. A | DIM. B | DIM. C |
|--------|--------|--------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

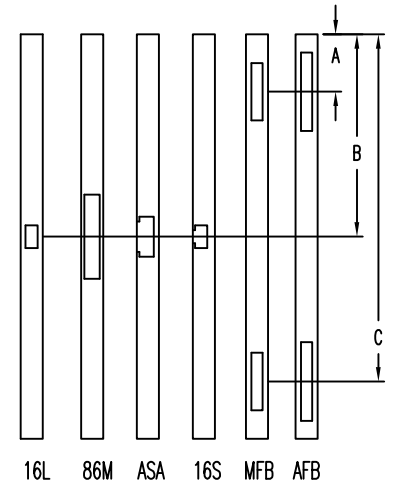

STEP 8: HOLE SIZE & LOCATION: STANDARD: ALL DOOR GUARDS & ASTRAGALS HAVE HOLES TO MOUNT WITH # 10 SCREWS. HOLES ARE LOCATED APPROXIMATELY 3" FROM EACH END, 3" FROM EACH CUTOUT, AND REMAINING HOLES NOT TO EXCEED 12" ON CENTRE.

OR CUSTOM: SPECIFY HOLE SIZE AND LOCATION: _____

I APPROVE THE DESIGN AND DIMENSIONS AS SHOWN ON THIS TEMPLATE, AND I AUTHORIZE FABRICATION OF THESE PARTS.

FULL NAME: _____

SIGNED BY: _____

P.O. #: _____

COMPANY NAME: _____

DATE: _____

S.O. #: _____

PHONE #: _____

EXT.: _____